


LOGIX SHRINK BUNDLER

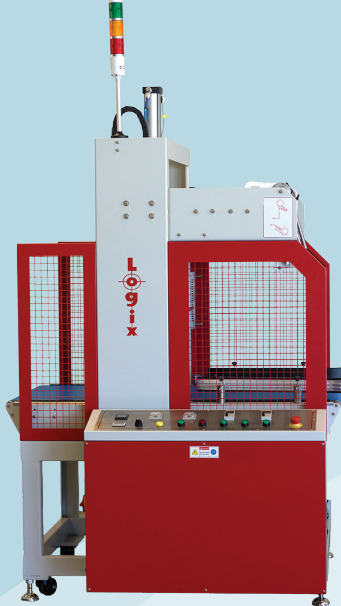

APW-6040D

Perfect for products that have an opening (often called "bulls eyes") at the two ends. Commonly seen for water bottle packaging where the openings can act as handles. A sleeve wrapper is an excellent solution for bundling a wide variety of heavier products.

- Direct feed-in type conveyor; no limit of package length
- Machine can be incorporated within a line or operated individually
- Sensor-controlled production process allows trouble-free operation
- The heated, constant-temperature sealing system ensures neat and firm sealing

Specifications	APW-6040D	APW-8040D
Item	186092	186097
Max. Sealing Width (inches)	23"	31"
Max. Product Height (inches)	14"	14"
Capacity	Up to 10 pieces per minute	
Applicable Multi-Format Type	With Tray	
Product Feeding	Power Conveyor	
Power Requirements	220V, 3 phase, 10 amps	
Air Requirements	4 cfm @ 85-100 PSI	
Maximum Film Roll Weight	50 lbs	
Sealer Foot Print (inches L x W x H)	53.15" x 44.1" x 75.99"	



With Tunnel

LOGIX BUNDLER TUNNEL



APT-6040PE

Two zoned temperature chambers with dual blower fans ensure a fast, strong shrink process on PE films.

Specifications	APT-6040PE	APT-8040PE
Item	186093	186098
Tunnel Capacity (inches L x W x H)	47" x 23.5" x 15.5"	70" x 31.25" x 15.5"
Tunnel Foot Print (inches L x W x H)	86.61" x 38.19" x 62.99"	110.24" x 46.06" x 62.99"
Conveyor Speed (Max)	98 Feet / Minute	
Power Requirements	220V, 3 phase, 60 amps	



Strategic. Packaging.

2111 32nd Avenue, Montreal, Quebec H8T 3J1
 Tel: (514) 420-6060 • Fax: (514) 420-6015
 250 Trowers Road, Unit 7, Vaughan, Ontario L4L 5Z6
 Tel: (289) 256-2141 • Fax: (289) 256-2142
 Toll Free: 1-800-363-0697 • www.doverco.ca • sales@doverco.ca



* All Logix equipment is CSA or equivalent special inspection certified for insurance compliance liability.