


## LOGIX SEMI-AUTOMATIC SHRINK COMBO SYSTEMS



**AP-1519**

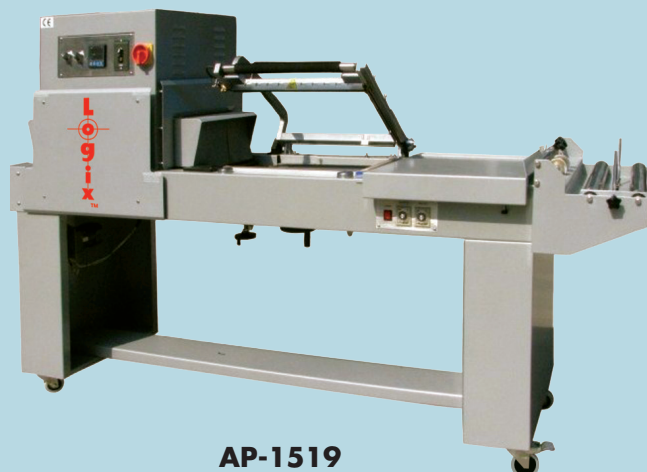

**AP-1622**

This very rugged combination L-Sealer and Tunnel Combo System is suitable for all types of packages. Easy portability allows you to move the unit to where the job is most efficiently run and then out of the way during down time. The tall 8" tunnel height of the AP-1622 unit can accept a wide range of sizes.

### Features

- ✓ Quick film loading system
- ✓ Automatic conveyor belt transports the product into tunnel
- ✓ Height adjustment ensures that the sealing line is in the center of product
- ✓ Micro knife seal system (Teflon coated)
- ✓ Tunnel height adjustable to fit the sealer height
- ✓ Hot air cycling tunnel with velocity control
- ✓ AC variable speed drive with frequency inverter
- ✓ Digital temperature control
- ✓ Automatic cool down function

### Specifications

- Tunnel conveyor equipped with live rollers and covered with silicone tubing

Item	Model	Seal Area	Max. Film Width	Tunnel Chamber Dim. (W x L x H)	Power			Machine Dim. (W x L x H)	Speed Pkg/Min.	Weight
					Voltage	Phase	Amp			
186044	AP-1519	15 x 19"	19"	16 x 20 x 6"	220V	1	23	28 x 75 x 53"	Up to 8 - 10	600 lb
186048	AP-1622	16 x 22"	20"	18 x 28 x 8"	220V	3	25	32 x 103 x 62"	Up to 10 - 15	925 lb