

# Shanklin<sup>®</sup> Models T-6H

## Shrink Tunnel

Built to Last, Engineered to Perform, and Priced for Optimum Value




- **Dependable**—Straightforward design means less maintenance, trouble-free operation.
- **Easy to Use**—Set temperature, conveyor speed and air velocity, and you're ready to go.
- **Moderately Priced**—An excellent value!

Simple, reliable, and hard-working...that's the Shanklin high-performance line of proven shrink tunnels. Contact your Shanklin distributor to find out more.


## Our Rugged, Reliable Compact Performer

The Shanklin Model T-6H Shrink Tunnel is similar to our Model T-6XL, except that the opening height is 3" higher (10") to accommodate higher profile packages. You'll still enjoy the same excellent high performance, versatile standard features, superior shrink capabilities, and value price of the Model T-6XL, but in a version that expands your packaging options.

## T-6H/T-6HC Plan Views

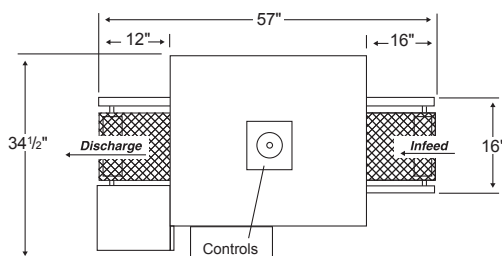

T-6H

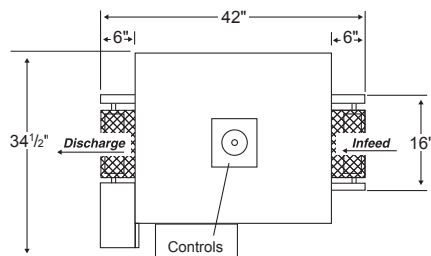

T-6HC

STAINLESS STEEL MODELS AVAILABLE

## Shanklin Model T-6H Specifications

|                               | Model T-6H  |
|-------------------------------|---|
| <b>Tunnel passage</b>         | 10" high x 18" wide x 30" long  |
| <b>Overall dimensions</b>     | 67" high x 34 1/2" wide x 57" long*   |
| <b>Conveyor height</b>        | 28" minimum, 40" maximum  |
| <b>Conveyor speeds</b>        | Variable from 15 to 66 ft./min.   |
| <b>Blower motor</b>           | 3/4 hp, single phase capacitor start  |
| <b>Heaters</b>                | Three finstrip (encased element)  |
| <b>Power</b>                  | 230 volts, 38 amps, 1 phase, 8.7 KVA max. (4.4 KVA normal usage)  |
| <b>Temperature controller</b> | Precision indicating controller<br>Calibrated 50° to 500° F   |
| <b>Controls</b>               | <ul style="list-style-type: none"> <li>• Conveyor variable speed control</li> <li>• On/off circuit breaker</li> <li>• Auxiliary heater switch</li> <li>• Variable air velocity control</li> <li>• Conveyor on/off switch</li> </ul> |
| <b>Accessories</b>            | <ul style="list-style-type: none"> <li>• Teflon belts</li> <li>• End viewing window</li> <li>• Package guides</li> <li>• Casters</li> </ul>   |

\*A 42" long compact conveyor is available as a Model T-6HC. See plan view at left.

U.S. Patent No. 3,312,811. Specifications on all machines subject to change without notice. Some photos may show accessories not part of the basic machine.

## The Perfect Partner

Partner your T-6H Shanklin Shrink Tunnel with a Shanklin A-26A Automatic L-Sealer for a complete, dependable, quality shrink packaging solution.



T-6H

A-26A

 **Sealed Air**

Distributed by:

**DOVERCO**  
Strategic. Packaging.

2111 32nd Avenue, Montreal, Quebec H8T 3J1  
Tel: (514) 420-6060 • Fax: (514) 420-6015  
250 Trowers Road, Unit 7, Vaughan, Ontario L4L 5Z6  
Tel: (289) 256-2141 • Fax: (289) 256-2142  
Toll Free: 1-800-363-0697 • www.doverco.ca • sales@doverco.ca

Corporate Office: Sealed Air Corporation  
200 Riverfront Boulevard, Elmwood Park, NJ 07407 USA www.sealedair.com  
© Reg. U.S. Pat. & TMOff. © Sealed Air Corporation (US) 2008. All rights reserved. Printed in the U.S.A. The "9 Dot Logo" and "Sealed Air" are registered trademarks of Sealed Air Corporation (US).

rev 3/6/08