

## Sleeve wrappers

Clear-cut line and functionality. An heavy-duty bundler you can really rely on rugged and solid, automatic or semi-automatic. You decide who controls.

### >> general features

Our range of poly bundler machines are suitable for packaging of grouped products (cans-bottles) or single products (furniture, radiators) medium and big sizes as these models are available in different dimensions.

### >> specific features

Packaging machine with two rolls. These models are available in different versions from 700 to 3000 mm in width and height of the product up to 600 mm. The compact models can be integrated with the tunnel to the machine body by reducing space and power consumption.


### >> details



Compact version, space and energy saving.




The machine can be equipped with in line conveyor; 90° conveyor with pusher for higher speed, and for automatic multipack forming.

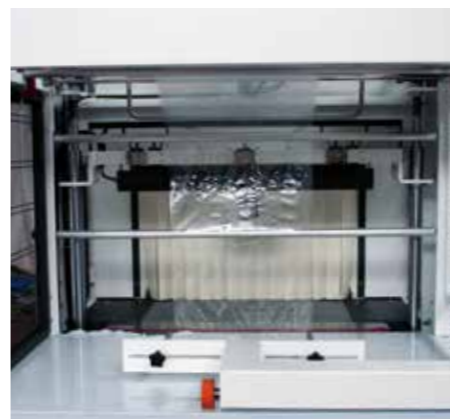

Semiautomatic version with pusher manually activated.



90° automatic grouping & feeding version. Different layout can be done for products feeding from left or from right.

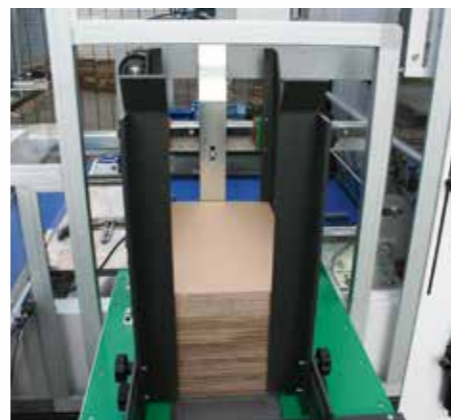


Available automatic carton pad feeder.




All movement on linear Hiwin guides.



Both film roll in lower position for easy load.

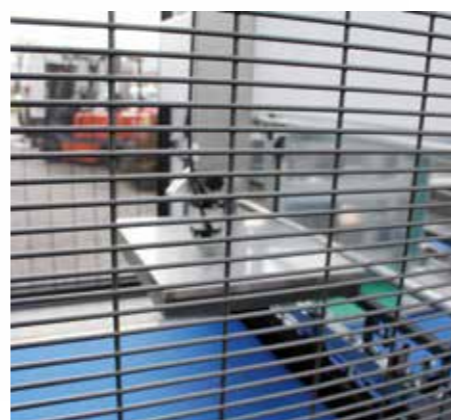

Product Hold down standard.

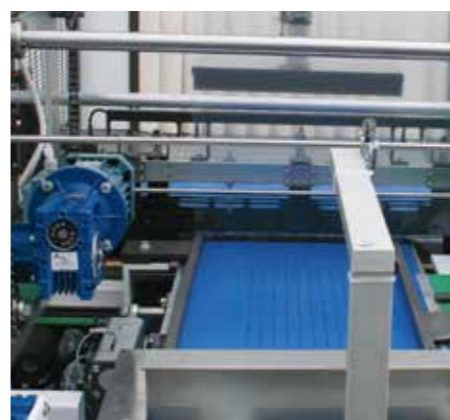

Motorized Sealing bar & pusher.

**DOVERCO**  
Your Deliveries. Our Solutions.

2111 32nd Avenue, Montreal, Quebec H8T 3J1  
Tel: (514) 420-6060 • Fax: (514) 420-6015

250 Trowers Road, Unit 7, Vaughan, Ontario L4L 5Z6  
Tel: (289) 256-2141 • Fax: (289) 256-2142


Toll Free: 1-800-363-0697 • [www.doverco.ca](http://www.doverco.ca) • [sales@doverco.ca](mailto:sales@doverco.ca)

**PREFERRED PACKAGING ITALY**  
leader in the manufacturing packaging equipment

**DM  
PACK**

>> **ARES**


sleeve wrappers

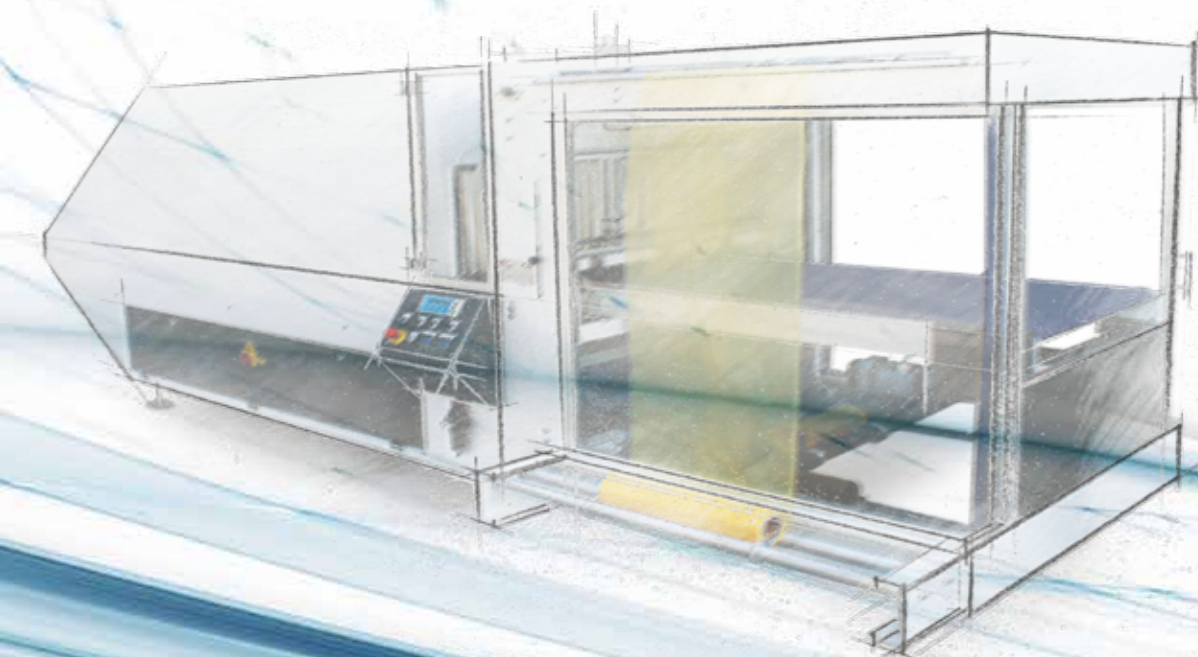

GB

ARES/VO/2014 - rettangolare.it

# ARES

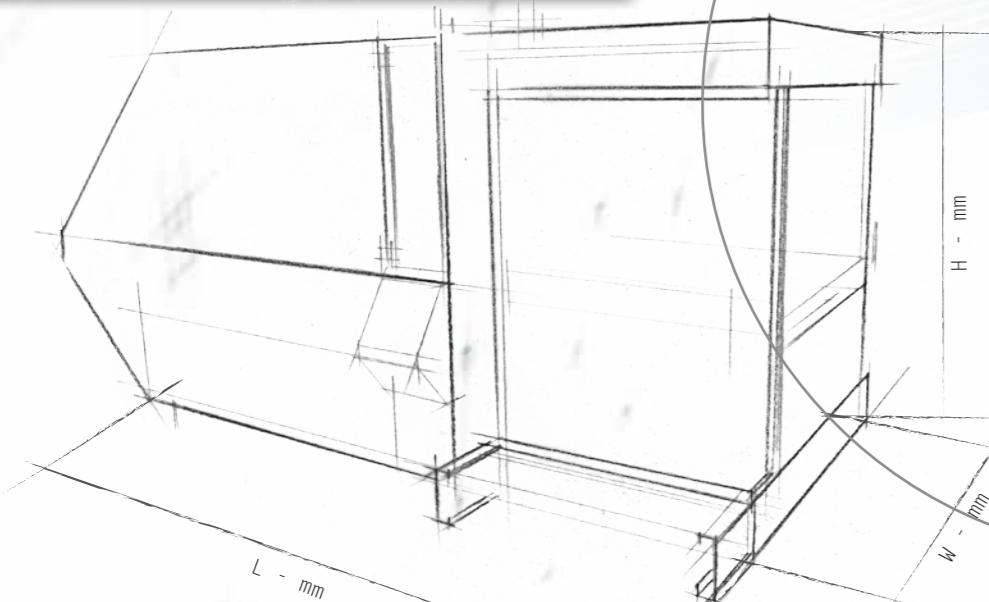

sleeve wrappers

## >> technical features

MOD.	700 N 700 S 700 N90° *	900 N 900 S 900 N90° *	1200 N 1200 S 1200 N90° *	1500 N 1500 ST 1500 N90° *	2000 N 2000 S 2000 N90° ***	2500 N 2500 S 2500 N90° ***	3000 N 3000 S 3000 N90° ***
Sealing bar width	750 mm	950 mm	1250 mm	1550 mm	2050 mm	2550 mm	3050 mm
Max product width	700 mm	950 mm	1200 mm	1500 mm	2000 mm	2500 mm	3000 mm
Max product length	****	****	****	****	****	****	****
Max product height	400 mm optional up to 600	400 mm optional up to 600	400 mm optional up to 600	400 mm optional up to 600	400 mm optional up to 600	400 mm optional up to 600	400 mm optional up to 600
Film width	700 mm	900 mm	1200 mm	1500 mm	2000 mm	2500 mm	3000 mm
Film roll diameter	350 mm	350 mm	350 mm	350 mm	350 mm	350 mm	350 mm
Working height	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50

**S:**  
semiautomatic version with pusher  
**N:**  
with inline conveyor

**N90°:**  
with 90° conveyor and automatic pusher  
**T:**  
with shrink tunnel

\* Combo version with tunnel available  
\*\*\* Available with separate tunnel  
\*\*\*\* depending on products length the machine can be equipped with an additional central conveyor between machine & tunnel. Different layouts and products feeding available

>> Shrink Tunnel is always double chamber. With double ventilator for metallic net cooling down and nicer shrinking quality.

>> Inline version, simple and compact of easy -friendly use. Siemens controller.

>> Motorized sealing bar. Double thickness reinforced conveyor belts. Available options for heavier and lighter products.

>> Both film roll position underneath for easy change and load.

>> Same components used as for the other machines. ISO certificated. Siemens panel easy set up.